

LED water proof light Installation and Operation Manual

SKU : E188	EAN : 5061004710925	Model Number : LG07M-15-50-TP-TC
-------------------	----------------------------	---












Please read the following instructions carefully to ensure that mounting operation will be carried out in the right way .These instructions should be properly preserved for future reference.

Specifications

Data \ Item	LG07M-15-50-TP-TC	TP = Power Adjustable Switch TC = CCT Adjustable Switch
RATED WORKING VOLTAGE	220-240V~ 50/60Hz	
Wattage	25W/50W	
protection class	I	
protection	IP65	
Colour temperature	3000K/4000K/6500K	

Safety tips

1. Use H07RN-F, 3x1.5mm² rubber cable.
2. Luminaire should be installed by authorized electrician only acc. to national wiring rules.
If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard.
3. The power supply must be deactivated prior to assembly, maintenance, exchanging the bulb or cleaning processes. Remove the fuse or switch the fuse to OFF and secure from reactivation.
4. Screw the gland.
5. Connect brown wire(L) to terminal L, blue wire (N) to terminal N, connect the grounding wire and green/yellow fixture wire .
6. Terminal box installed back, the terminal box must be installed the correct position.

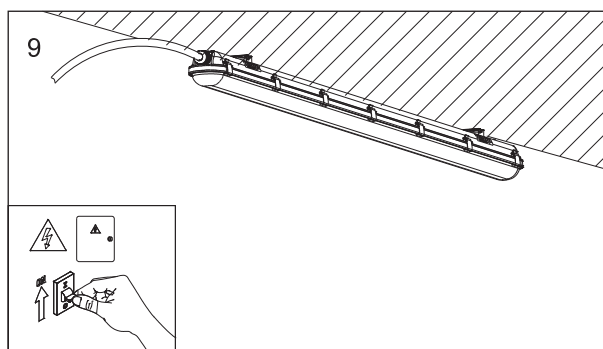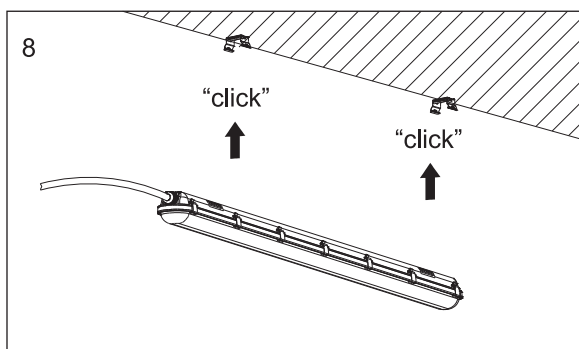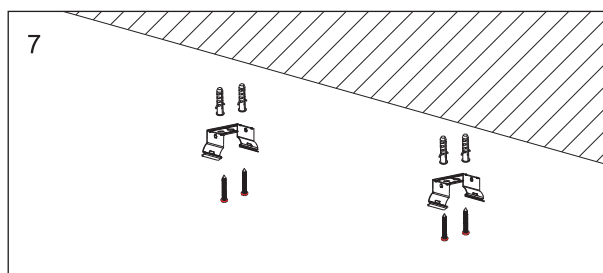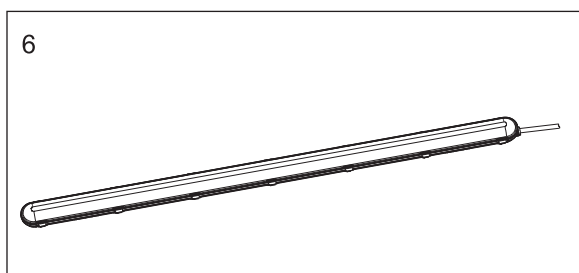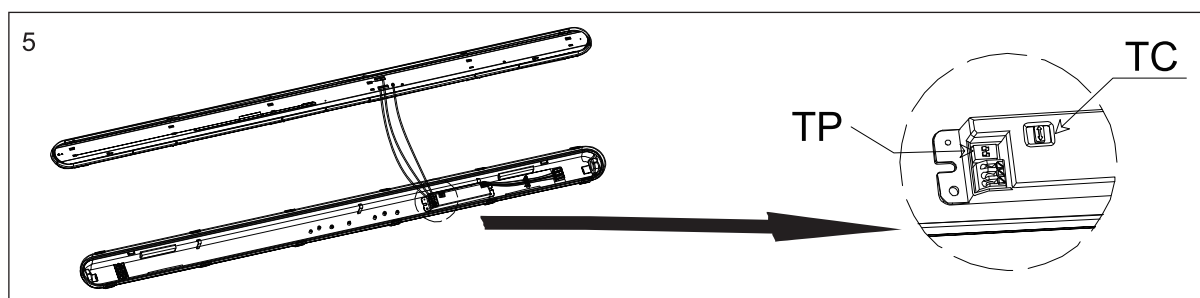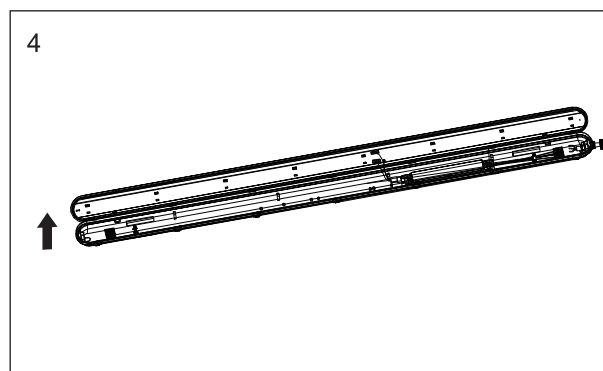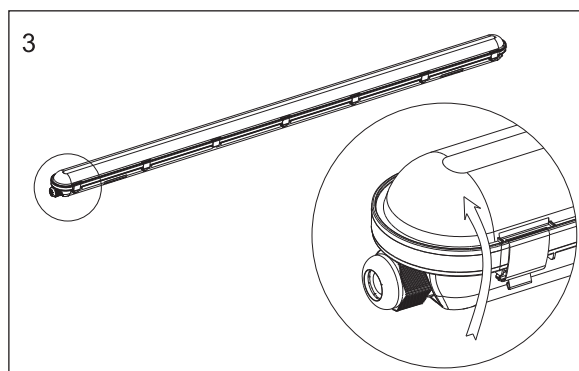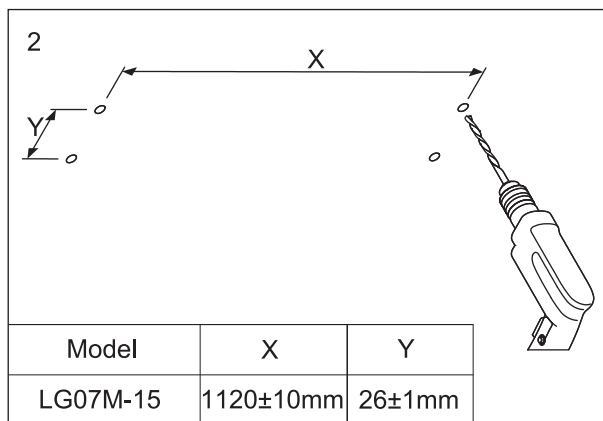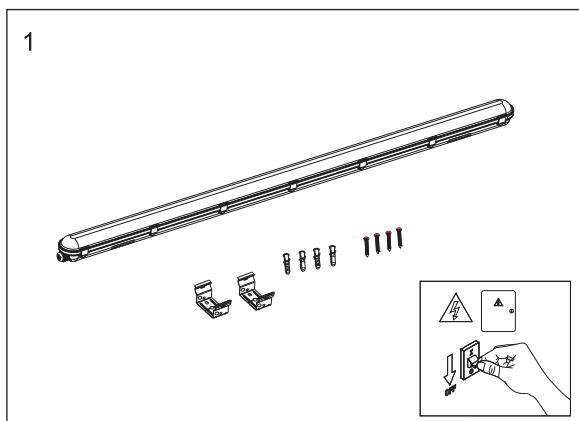

Stuck? Confused?

Contact our Technical Support team on:
 T: +44 (0)1291 446 105 E: support@ener-j.co.uk
 Lines are open Mon - Fri (8am to 4pm)

Imported and Marketed By:
 ENERJ SMART LTD.
 Unit 11D cosgrove Way, Luton LU11XL,
 United Kingdom