

PREMIUM WIRELESS CCTC KIT

WITH 4 X OUTDOOR BULLET CAMERAS, 15.6 MONITOR & 8CH NVR WITH 1TB HDD PRE INSTALLED



2.4 Ghz
Wi-Fi Control



Motion
Alarm



Remote &
Local Playback



Human
Detection



HD Night
Vision



App
Support



INSTANT EMAIL ALARM WITH SNAPSHOTS

As soon as the system captures anything suspicious, it sends off an email alert with snapshots to keep you informed. Therefore, you will know whatever accident happens in your house.




NO WIRING NEEDED REAL PLUG AND PLAY SYSTEM

Enjoy the freedom to place the NVR and the IP cameras anywhere in or around your house with no wiring needed. And the steady and reliable Wi-Fi transmission between the NVR and the cameras can work well even without a router.

UP TO 100FT NIGHT VISION WITH SMART IR

The cameras feature 100ft/30m night vision range to keep your property safe through the night. With the powerful infrared LEDs, you can enjoy sound sleep all year round and get complete peace of mind.

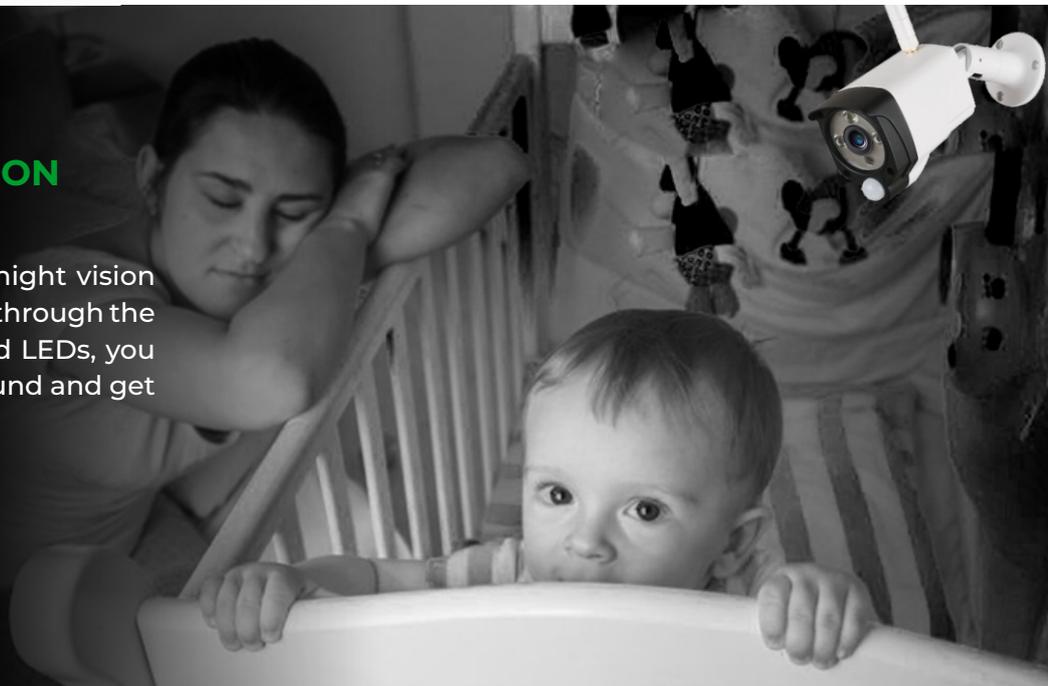

Key Features:

1. FHD video output
2. Automatic connection with IP, save installation cost
3. Plug and play, P2P service
4. Mobile viewing, iphone&android app
5. Free DDNS
6. High definition LCD display
7. Built-in PIR sensor for motion detection
8. Built-in Microphone

Item specifics

- up to 4pcs 1080P Wifi camera
- 1pcs 8ch 10800P Wifi NVR
- 1pcs network cable
- 1pcs 12V 3A(NVR)+4pcs 12V 1A (Camera) power supply
- English User Manual
- CD(CMS,mobile app>manual)
- Mouse

Wireless NVR Specification

| | | |
|--------------------------------|--------------------------|--|
| Model | | : M1560HN8-W |
| System | Operating System | : Embedded Linux OS |
| Display device | Screen | : 15.6 inch LED LCD (16:9) |
| | Viewing angle | : Horizontal:178deg. Vertical:178deg. |
| | Response Time | : 8ms |
| | Luminance Contrast ratio | : 400:1 |
| | Central Luminance | : 220cd/m2 |
| AV(audio/video)input | Network Video | : up to 8CH 1080P |
| | AUDIO Bitrate | : 64Kbps |
| AV (audio/video) output | HDMI output | : "1ch,resolution: 1024x768,1366x768, 1440x900,1920x1080p" |
| AV CODEC Specification | Video Resolution | : 720P/960P/1080P |
| | synch-playback | : 4CH |
| Video Control | Video/Capture mode | : Manual, Time, Motion, Event |
| | Playback mode | : Real time, Routine, Event |
| | Backup | : USB backup |
| Hard Disk | Type | : 1*SATA interface |
| | Hard Disk Included | : 1Tb |
| | Max Capacity | : Up to 6 TB each HDD(3.5") |
| External Interface | Network Interface | : 1 adaptable RJ45 10M/100M,1WIFI interface |
| | USB Interface | : 2 USB 2.0 |
| Network Control | Protocol | : "UPnP (play&plug)/SMTP (email service) /PPPoE (dial-up) DHCP (Automatically obtain an IP address), etc..." |
| | | |
| Others | Power Supply | : DC12V3A |
| | Power Consumption (W) | : ≤15W Without HDD) |
| | Operate Temperature (°C) | : -10°C~+55°C |
| | Working Humidity (%) RH | : 10%~90% |
| | Size | : 393x57.5x248mm(W × D × H) without bracket |
| | Weight (excluding HDD) | : TBD(with bracket) |

IPC Specification

| | | |
|------------------------------|------------------------------|-----------------------------------|
| Technical Parameters | Model | : C2019HN4-W |
| | Sensor | : 1/2.9" Progressive Scan Sensor |
| | Signal System | : PAL/NTSC |
| | Resolution | : 1920 x 1080 |
| | Minimum illumination | : Color: 0.01 Lux; B/W: 0.001 Lux |
| | Shutter | : 1/25s to 1/25,000s |
| | Lens | : f=3.6mm |
| | View angle(horizontal) | : 90degree |
| | OSD | : Date Time & Title |
| | White Balance | : Auto |
| | Day&Night | : Auto / Color / BW |
| | 3D-DNR | : Auto |
| | Mirror/Flip | : On / Off |
| | Video codec | : "1920x1080@15ps or below |
| | Audio codec | : G.711 A-Law @ 16bits 8kbps |
| | S/n | : >39.1dB |
| | Interface | : Rj45 / WIFI 802.11b/g/n |
| General Specification | Anti-thunder Level | : Standard IEC61000-4-5 |
| | Working Temperature/Humidity | : -10°C to +50°C / 30% to 80% RH |
| | Working Temperature/Humidity | : -20°C to +60°C / 20% to 90% RH |
| | Power Input | : DC12V-1A |
| | Power consumption | : ≤6W |
| | Size | : 175(L)×62(W)×82 (H)mm |
| | Weight | : 700g |
| | Camera Level of Protection | : Ip66 |

Thank you for choosing ENER-J!

Customer satisfaction is our TOP priority, please let us know how you felt about your experience. Happy? We are so happy that you are pleased with our product. Feel free to express your newfound joy! Share your experience by writing a review.

Not Happy? If you are not fully satisfied with the item you received, have any problems like damages, or questions, please contact us. We typically respond within 24-48 hours.

Stuck? Confused?

Contact our Technical Support team on:

T: +44 (0)2921 252 473 | E: support@ener-j.co.uk

Lines are open Mon - Fri (8am to 4pm)