

# Smart Key Box Bluetooth



SKU Code: SHA5333



Secure Virtual  
password



Two methods  
of Unlocking



Remote  
authorization  
Unlocking



Waterproof  
IPX5




Type C  
Charging Port



12+months  
battery life

## Features

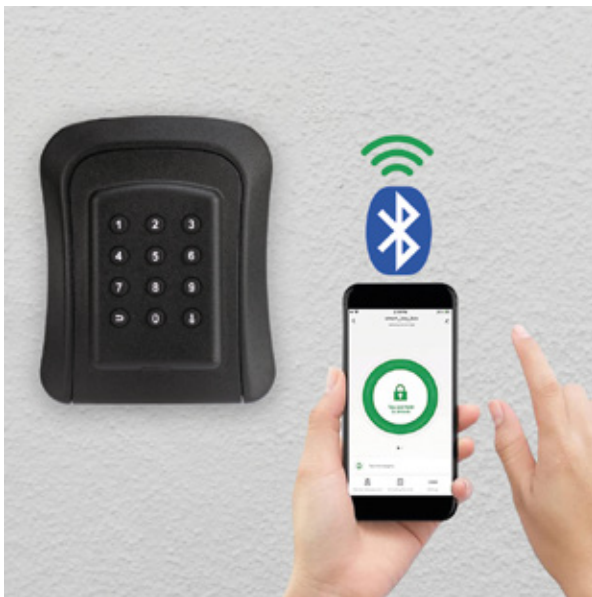

- This Smart Bluetooth enabled lock box is a reliable entry backup plan. The only two things you have to do is placing the key or card in the box, then set the password for yourself, family members or friends and you will never be locked out again. This Key Lock Box provides you another fast and safe access to your home.
- App control via Bluetooth, you can manage property accessibility safely, conveniently and smartly, both for you and your guests.
- Every time when the box is been opened, Smart Life App will keep all the tracks in the opening record, you can have a piece of mind knowing who, when and with which method of accessing.
- Sturdy and reliable: The security is extremely high, it is not easy to be damaged, and the special anti-theft material is used to safely store the items you put inside.
- It is ideal for home as well as for B&B hotel. Use it to store all kinds of keys, convenient and fast, without having to face-to-face contact with the tenant.

## Technical Specifications:

SKU	SHA5333
Size	115*95*45 mm
Materials	Zinc Alloy
Working Voltage	4.5V
Battery Life	12 + months
Working Temperature	-20°C~-50°C
Power Interface	Type C
Internal Size	86*65*34
Waterproof	IPX5

## Main Features

- Bluetooth & passwords unlock.
- Intergrate with TUYA platform.
- AES encryption algorithm
- Can be shared with invited users.
- Remote controlled via Gateway
- Low power consumption
- Trackable logs
- Large capacity



## Download APP :



Searching "Smart Life" on stores to download and install the APP.



## Create Account

Follow instructions in app to create an account with user's mobile phone number.

## Install Battery

(4 AAA Alkaline not included)

Use the Micro USB cable to connect the charging port, then enter the initial passwords 123456+OK button to open the front lid to install the batteries.

## Add Device

- ▶ Register the "Smart Life" account and log in (Need network);
- ▶ "Add Device" or click the symbol "+" in "Home" page;
- ▶ Select "Auto Scan" to start searching device;
- ▶ Click "Next" to add the key box.

## Temporary password types

(Passwords don't show on records)

**Time-limited password:** (Use at least once within 24 hours after it takes effect)

**One-time password:** (Only one time to unlock and valid for 6 hours)

**Dynamic password:** (Multiple times to unlock and valid for 5-10 minutes)

**Clearing password:** (The selected password or all the time-limited one that has been used would be deleted. It is valid for 24 hours)

**Custom password:** (The device must connect to user's phone thru bluetooth)

## Temporary Passwords Management:

Password sharing settings: (The receiver must have their app account)

- ▶ Register the "Smart Life" account and log in (Need network);
- ▶ "Add Device" or click the symbol "+" in "Home" page;
- ▶ Select "Auto Scan" to start searching device;
- ▶ Click "Next" to add the key box.

Mobile phone password settings:

- ▶ Login APP-- Select device and enter the "Temporary" page;
- ▶ Select password type under mobile phone option;
- ▶ Enter the receiver's mobile phone or email address;
- ▶ The receiver login the app and unlock the device.

## APP Unlock:

Rapid unlock:

- ▶ Login APP
- ▶ Enter the device page- Long press the unlock icon.

## Password Unlock:

- ▶ Enter the passwords;
- ▶ Press OK button on the device keypad.

## View Access Logs:

- ▶ Login APP
- ▶ Enter the device page
- ▶ Click unlocking records.

## Product Parameters:


- ▶ Materials: Zinc Alloy
- ▶ Working Voltage : 4.5V
- ▶ Battery Life : 12+ months
- ▶ Waterproof Rating : IPx5
- ▶ Power Interface : Type C
- ▶ Working Temperature : -20°C~50°C
- ▶ Overall Size : 115\*95\*45mm
- ▶ Internal Size : 86\*65\*34

## Remove Device: (APP and the lock box MUST keep connecting)

Press the device icon on the home page for 3 seconds;

- ▶ Click [ Remove device] to delete.

## Share Device:

- ▶ Login APP
- ▶ Enter the device page;
- ▶ Click the  symbol on the upper right corner;
- ▶ Share device.

## More Settings:

- ▶ In the smart scenes, the user will have better experience by using these functionalities. Please follow the instructions to edit the scenes.

## Accessories

- |                  |             |               |             |
|------------------|-------------|---------------|-------------|
| ▶ Key Box        | -- 1 Piece  | ▶ User Manual | -- 1 piece  |
| ▶ Drill Template | -- 1 Piece  | ▶ USB Cable   | -- 1 piece  |
| ▶ Bolts          | -- 4 Pieces | ▶ Screws      | -- 4 Pieces |

## Installation

- 1) Mark 4 positioning points on the wall or door with the drilling template.
- 2) Use electric drill to punch holes in marking positions (@6 x30 mm), then insert the plastic bolts.
- 3) Open the front lid and fix it with the screws in the installation bag.

## Notes:

- 1) The 4 AAA alkaline batteries are not included. Please use Micro USB cable to connect the charging port then enter 123456+OK button to open the lid to install the batteries before getting start.
- 2) After the lock box is configured,the initial password 123456 will be invalid and needs to be modified in the password settings.
- 3) It needs network connection to set password,view record,remove device.
- 4) Once the box is binded, only need to enable Bluetooth to unlock.
- 5) The family members are the administrators,with all permissions to set and modify passwords, share devices, view records, etc....  
Other members,who join the group via invitations are ordinary users,only allow to unlock via mobile phone or the passwords shared by the administrator.

FCC, CE, RoHS Certificates

## Stuck? Confused?

Contact our Technical Support team on:

T: +44 (0)2921 252 473 E: [support@ener-j.co.uk](mailto:support@ener-j.co.uk)

Lines are open Mon - Fri (8am to 4pm)