

100W LED Floodlight

LED SMD Non-PIR Floodlight



 **IP65**

 **100**
Watts

 **120°**



SKU Code: T210X


Features:

- ▶ **Heat Dissipation:** The housing of the Floodlights is made to flow out the heat so that the Floodlights are durable
- ▶ **High Brightness:** This 100W LED Floodlight produces up to 10000lm outputs and has a 120-degree wide beam spread, which is great to provide wide coverage security illumination for your commercial or residential property. It's a great replacement for the traditional halogen bulbs, saving over 80% on your electricity bill.
- ▶ **IP65 Waterproof:** The lights have durability and a fully sealed protective design and withstand all extreme weather conditions, perfect for outdoor and indoor, such as garages, gardens, yards, lawns, parks, patios, and so on.
- ▶ **Easy Installation:** The LED Floodlights come with an adjustable metal bracket, more stable and reliable. You can easily install it on the ceiling, walls, ground, and other locations by adjusting the different angles to meet your different needs.

Technical Specifications:

Model Number	SL 1-12-100W		
LED Type	Chinese Sanan 2835	CCT	6000K
LED Quantity	140 pcs		
System Efficacy		CRI	80
Luminous Flux	10000lm	Beam Angle	120degree
Electrical Data			
Power Supply		Power	100W
Input Voltage	AC110-265V	Power Factor	>0.9
Input Surge Protection			
Others			
System Power Consumption	100W+-10%	Storage Temperature	
Housing	Aluminum die-casting tempered glass	Operating Temperature	
Body Color	black	Cable	1 m 3G1.0 Rubber cable
Ingress Protection and IK Rating		Operating Humidity	
LED Life Span	25000h	Luminaire Net Weight	1.438kg
Outlook Dimensions	174*38*233mm	Export Carton Size	43.5 x 32 x 31 CM
Protection	ClassI IP65		

Photometric diagram

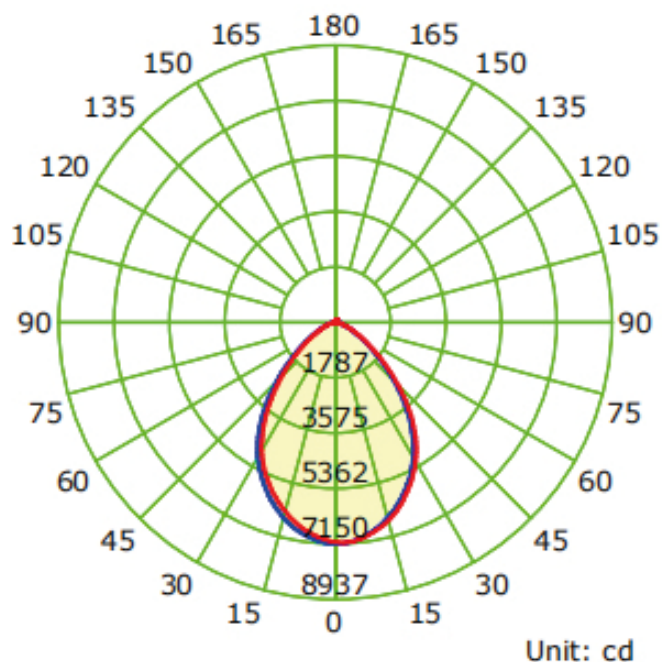



Warning

- This product should be installed or maintained by trained electricians.
- Check integrality of the products when unpack the package and make sure there are no any damages, otherwise please call distributors for replacement.
- The distance between the light fixture and any flammable materials must be more than 20cm. The distance between the upper part of the installed light fixture and the ceiling must not be less than 2cm. The light fixture must not be installed into ceilings or walls that contain heat-insulating material.
- Please make sure to cut off power supply before installation, replacement or removal.
- Please read manual carefully and wire correctly.
- Do not remove the stickers on drivers or light fixtures
- Never leave children unattended in the vicinity of the light fixtures and do not allow them to play with electrical devices
- Never allow the fixture to come into contact with open flames or external heat sources, or UV rays.
- The products need special treatment of recycling after service time.

Thank you for choosing ENER-J!

Customer satisfaction is our TOP priority, please let us know how you felt about your experience. Happy? We are so happy that you are pleased with our product. Feel free to express your newfound joy! Share your experience by writing a review.

Not Happy? If you are not fully satisfied with the item you received, have any problems like damages, or questions, please contact us. We typically respond within 24-48 hours.

Stuck? Confused?

Contact our Technical Support team on:

T: +44 (0)1291 446 105 E: support@ener-j.co.uk

Lines are open Mon - Fri (8am to 4pm)