



LED SMD Non PIR Floodlight













.



300 W

30000 Lm

6000K

IP 65

1 meter Length of the Cable

85V-265V

120°

SKU CODE:

T214X

Ean Code on box:

5060774551707

Packing

Inner Qty

1pc pack

Features:


- Our product is built with high quality 600 PCS 2385 SMD chips. The temper glass places a solid high transmittance around the room. Our LED flood light is equivalent to 1500W Halogen Bulb. The floodlight also saves 80% of your energy as compared to traditional Halogen lamps. Lighten up your atmosphere with our EXTREMELY BRIGHT LED floodlight!
- **MODERN DESIGN:** The multiple groove shaped design on the back helps to increase air contact around the area. It slows down heat dissipation without developing any security risks. The wire length is 60cms and working voltage (85-265V); this helps you to save wire costs. It also has a 180-degree beam angle
- **WATERPROOF:** Our product is certified with IP66 rating. This can be ideal for indoor and outdoor use. (We recommend that you DO NOT submerge it into water.)
- **USAGE:** Our Floodlights can be used on roads, gardens, bridges, billboards, streets, parks, trees, hotels, residential decoration and much more!
- QUALITY ASSURANCE: Our product passes the CE, ROHS Certification, and Certified by FCC.






Technical Parameters	
COLOUR/FINISH	6000K (black Body)
WATTAGE	300W
VOLTAGE	85V-265V, 50/60Hz
LIGHT OUTPUT	30000 Lumens
P.F	0.9+
LED CHIPS	EPISTAR 2835
DRIVER	CE Isolated Wide Voltage
BEAM ANGLE	120°
LIFE	30000 hours
SIZE	398x298x43MM





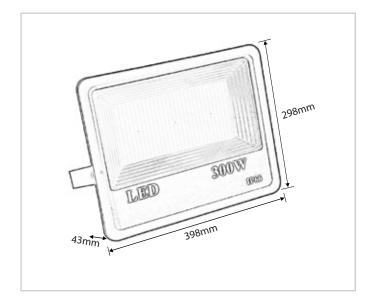

Thank you for choosing ENER-J!

Customer satisfaction is our TOP priority, please let us know how you felt about your experience. Happy?

We are so happy that you are pleased with our product. Feel f ree to express your newfound joy! Share your experience by writing a review.

Not Happy? If you are not fully satisfied with the item you received, have any problems like damages, or questions, please contact us. We typically respond within 24-48 hours.

Stuck? Confused?

Contact our Technical Support team on:

T: +44 (0)1291 446 105 E: support@ener-j.co.uk

Lines are open Mon - Fri (8am to 4pm)

