

















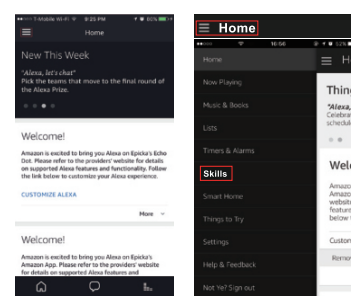














正面 ▼

 <p>Smart Dual Plug User Manual SHA5354 CLY813M-UK</p>	<p>Electrical Rating: 230V AC, 50Hz 13A load, 3120W General use Working Temp: -20~50°C Wireless Type: Wi-Fi 2.4GHz App Support: iOS/Android</p> <p>Warm Tips:</p> <ul style="list-style-type: none"> • Only supports 2.4 GHz Wi-Fi network • Simplified steps to install App on your smart phone or tablet on Apple/Google Play Store • Works with Amazon Alexa, Google Home • For indoor use only • Energy monitor available <p>How to connect Smart Plug to Wi-Fi network</p> <p>1. Download Enerjismart from  or  Download or scan the QR code and install the Enerjismart App for either iOS and Android.</p>   <p>Works on 2.4G WiFi network (5G Not compatible). If you still face issues pairing the device with your 2.4G WiFi network, you may also have to disable the firewalls during the pairing process.</p>	<p>Once downloaded, the app will ask you to register your device. Enter your phone number or email. If you selected phone number, you will receive a text with a registration code. If you choose email, you will then create a password. Attention: There's no Registration Code needed if email method chosen.</p>   <p>Please note: there're two modes configurations [EZ Mode / AP Mode] available for you to choose before adding the device to app. EZ Mode is recommended.</p> <p>EZ Mode Configuration (Common)</p> <ol style="list-style-type: none"> 1. Make sure quick mode configuration is initiated: the indicator light blinks blue rapidly (twice per second). If it blinks blue slowly (once every 3 seconds), press and hold the power button on the Smart Plug for 6 seconds until the indicator light blinks rapidly. 2. Tap the icon "+" on the top right corner of "Enerjismart", choose "Plug [BLE+Wi-Fi]" and enter into "Add Device". 	  <p>3. Follow the in-app instructions to connect the Smart Plug to your Wi-Fi network.</p>	 <p>4. Once connected, the App will prompt the connection, and click "Done".</p> <p>5. Now you can control the Smart Plug through Enerjismart APP.</p> <p>6. Once the configuration is completed successfully, the indicator light will turn to solid blue and the device will be added to the "Device List".</p> <p>AP Mode Configuration</p> <ol style="list-style-type: none"> 1. Make sure AP mode configuration is initiated: the indicator light blinks blue slowly (once every 3 seconds). If it blinks blue rapidly (twice per second), press and hold the power button on the Smart Plug for 6 seconds until the indicator light blinks slowly. 2. Tap the icon "+" at the top right corner of "Enerjismart" tab and then select the device type (Electrical outlet), enter into the "Add Device" page, click "AP Mode" at the top right corner of "Add Device" tab to add device. 	  <p>3. Follow the in-app instructions to connect the Smart Plug to your Wi-Fi network.</p>	<p>4. Once connected, the App will prompt the connection, and click "Done".</p> <p>5. Now you can control the Smart Plug through Enerjismart APP.</p> <p>6. Once the configuration is completed successfully, the indicator light will turn to solid blue and the device will be added to the "Device List".</p> <p>Please note: you can add the Smart Plug to Echo/ Google Home following this instructions below. Or the one on the app (Open Smart Life App, go to "Profile" -> "Integration", tap "Amazon echo" or "Google Home" and install).</p> <p>How to connect Smart Plug to Amazon Alexa</p> <ol style="list-style-type: none"> 1. Launch Enerjismart App, sign in your account and make sure Smart Plug is in device list. 2. Modify device name so that Alexa can easily recognize, such as: Living Room Light, Bedroom Light, etc. 3. Minimize Enerjismart App, then Launch the Alexa App and sign in your Alexa account and make sure you have at least one Alexa voice -controlled device installed like Echo, Echo dot, etc. 4. In the upper left corner of Home page, click  button to show App menu. Then click  in the menu. 	<p>Warranty</p> <p>The product carries a one-year warranty from purchase date. Please feel free to let us know what we can do to assist you when you have any product problem.</p> <p>Customer Helpline Phone No.: +44 129 144 6105 E-mail: support@enerj-smart.co.uk</p> <p>Imported and Marketed By: ENERJ SMART LTD. Unit 11D Cosgrove Way, Luton LU11XL, United Kingdom</p> <p>SKU: SHA5354</p>     <p>Made in China</p>
--	---	---	---	---	---	---	---

反面 ▼

 <p>5. Type in Enerjismart in the search and click the search button next to it.</p>	<p>6. Enable Enerjismart to the skill, then sign in your Smart Life account to complete the account linking.</p> 	<p>7. After linked account successfully, you can ask Alexa to discover devices. Alexa will show all the discovered devices after 20 seconds.</p>  	<p>8. Back to Menu by clicking  button, and then click  button.</p>   <p>9. In Smart Home page, you can group your devices for different categories. Your Enerjismart APP has been skilled with Alexa. Now you can control your Smart Plug through Alexa.</p>	<p>How to connect Smart Device to Google Home</p> <ol style="list-style-type: none"> 1. Launch the Google Home App and make sure Google Home speaker is installed. If not, please follow Google Home speaker installation instruction to complete the installation. 2. Once Google Home is installed, in the upper left corner of App Home page, click  button to show App menu. Then click "Home Control" in the menu.   <p>3. On "Add device" page, scroll down to find "Enerjismart" and then click it. Sign in Enerjismart APP with your account and password. Choose Enerjismart APP in the dropdown menu to complete the account linking.</p>	  <p>4. After successful account linking, in Google Home App you can see all the smart devices from your Enerjismart App account. You can assign rooms for each device.</p> <p>Troubleshooting and FAQ</p> <p>1. What devices can I control with the Smart Plug? You can control lights, fans, portable heaters, and any small appliances in accordance with the Smart Plug's specifications.</p> <p>2. What should I do when I cannot turn Smart Plug on or off? Make sure your mobile devices and the Smart Plug are connected to the same Wi-Fi network. Make sure the devices connected to the Smart Plug are turned on.</p>	<p>3. What should I do when device configuration process has failed? You could:</p> <ul style="list-style-type: none"> • Check whether the Smart Plug is powered on or not. • Check whether your mobile device is connected to 2.4 GHz Wi-Fi network. • Check your network connectivity. Make sure the router is working properly. If the router is dual-band router, please select 2.4G network and then add Smart Plug. • Enable the router's broadcasting function. Configure the encryption method as WPA2-PSK and authorization type as AES, or set both as auto. Wireless mode cannot be 11n only. • Check for Wi-Fi interference or relocate the Smart Plug to another location within the signal range. • Check whether the router's connected devices reach the amount limit. Please try to turn off some device's Wi-Fi function and configure Smart Plug again. • Check if router's wireless MAC filtering functions is enabled. Remove the device from filter list and make sure the router is not prohibiting Smart Plug from connection. <p>• Make sure the password of your Wi-Fi network entered in App is correct when adding Smart Plug.</p> <p>• Make sure the Smart Plug is in ready for App-Configuration: the indicator light is quick blinking blue (twice per second) for quick mode configuration, slow blinking blue (once every 3 seconds) for AP mode configuration.</p>	<p>Repeat the App-configuration process. Factory reset the Smart Plug and tries to add it again.</p> <p>4. Can I control device through 2G/3G/4G cellular networks? The Smart Plug and the mobile device are required to be under same Wi-Fi network when adding the Smart Plug for the first time. After successful device configuration, you can remotely control the device through 2G/3G/4G cellular networks.</p> <p>5. How can I share my device with family? Run the App Enerjismart, go to "Profile" -> "Device Sharing" -> "Send", tap "Add Sharing", now you can share the device with added family members.</p> <p>6. How to reset this device? Factory reset: After Smart Plug is plugged into a power socket, press and hold (for 6 seconds) the power button for factory reset until the indicator light blinks blue rapidly. Indicator lighting pattern: • Quick blinking blue (twice per second): Quick mode configuration is initiated. • Slow blinking blue (once every 3 seconds): AP mode configuration is initiated. • Solid blue: The Smart Plug is connected to the Wi-Fi network. • Off: The Smart Plug is switched off and no Wi-Fi network.</p>
--	--	---	--	---	---	---	---

注:尺寸: 54x79.45 MM

材质: 105 g铜版纸彩色正反印刷

工艺: 风琴折页 LOGO朝外

备注: 外围线不印刷