ENER-J®
Smart Home Living

Make Your Home Smarter & Connected in Simple Steps with ENER-J





WIRE-FREE BATTERY POWERED IP CAMERA

Installation Guide

Download our app from

Download on the App Store

ANDROID APP ON Google play

ENERJSMART

ANDROID

iOS

+44 (0)129 144 6105
info@ener-j.co.uk
www.ener-j.co.uk

Please read it carefully before using the product, and keep this handy.

ENGLISH

1 What's in the box?

Consult the checklist below for all components.






IP Camera | Charger | Batteries | Manual


2 Description

Picture 1



1. Lens
2. LED
3. Light sensor
4. Motion detection sensor
5. Mic
6. USB interface
7. Speaker

Picture 2



8. Flip switch
9. AA battery
10. Powe switch
11. Micro-SD card
12. Reset button

3 Features


4 x AA specificaiton batteries work regularly for 4 months.


FHD megapixels collected with wide-angle lens.


Support mobile phone remote fast wakeup within 3-5 seconds.


2.4G Wi-Fi connection.


Support PIR motion detection, when someone hovers at the door, it will send push alerts to your mobile phone immediately.


With IR-cut, it can switch automatically and it is clearly visible at both day and night to keep you home and family safe..

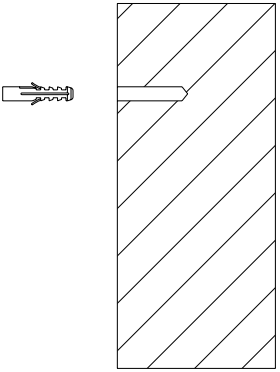

Support to power by USB port.

4 Specifiation

Lens	FOV/120° Wide-angle lens (4Glass)
Infrared LEDs	9pcs Infrared LEDs with 6 meters flash distance
PIR motion sensor	6 meters PIR distance
Storage	Up to 64GB Micro-SD card
Connectivity	802.11b/g/n Wi-Fi@2.4G
Power Consumption	Standby 200uA Working 260mA
Battery	4xAA specification battries
USB	DC5V
Wi-Fi distance	60 meters (open space without obstacle) 15 meters (indoor)
Video compression	H.264
Voice intercom	Two-way audio with noise cancellation
Video resolution	1920*1080@15fps
Notification	Push Notifications with 3-5 seconds
Device wakeup	Within 3S
Working temperature	-20°C~+60°C
Storage temperature	-40°C~+70°C

5 Product Installation

Step 1:
Install anchors (on stucco, brick or concrete) On stucco, brick or concrete, use the bit to drill one holes in your wall, install the anchors. Install the base bracket in the wall.



Step 2:
Please put the flip switch to "open" position and oepn the cover, then install four pcs AA battery in it. (please notice the polarity of the battery) Next put the power switch to "ON" position, press the RESET button for 5 seconds. When red and blue lights flash slowly, the device is connected to the network. Refer to pictur 2.

Step 3:
Align the device to the base bracket and hold it, then adjust the appropriate angle, the installation is finished.



1. USB interface is only used as power supply.
2. The mobile phone connects to the Wi-Fi of the home router, and the mobile APP can generate a QR code that made of router Wi-Fi name and password. The product recognizes the QR code through the lens on the product, and the product is automatically connected to the router and server after identification. At this time, the APP also finds the product through the server, and the APP can control the operation fo the product through the network.

If the product is under no Wi-Fi signal status, when have the motion dtection signal it can still trigger the product to record, and te video file can be viewed through the APP when the Wi-Fi is restored.

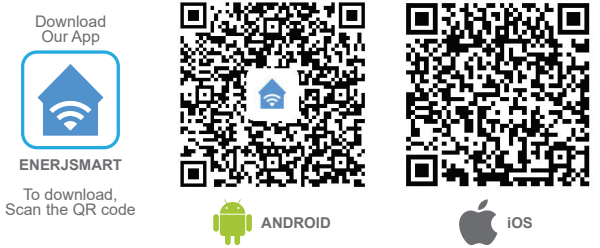
6 Install App

Download App:

Scan the QR code below to download and install.

Register and Login:

Open the “ENERJSMART” app to register and login according to the prompts.

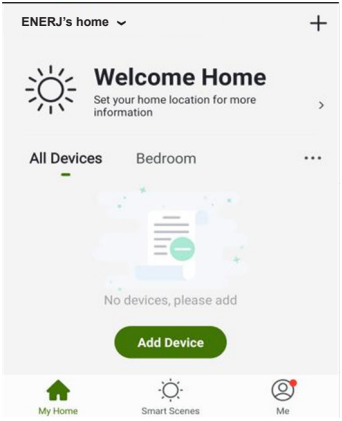


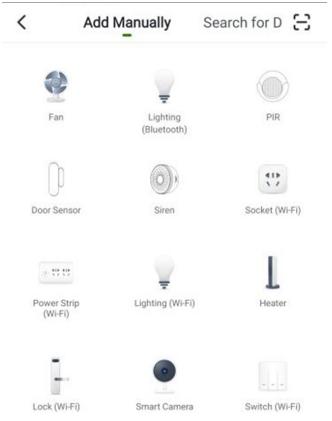
7 Add the Device

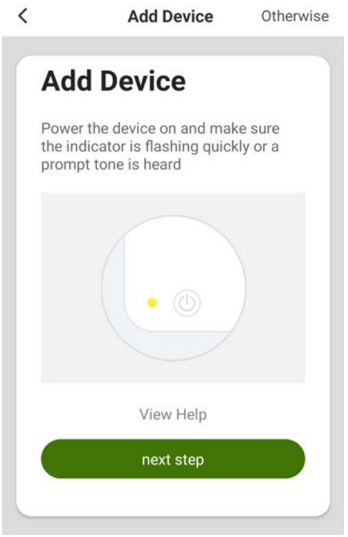
Please make sure that there is a available Wi-Fi and the internet is connected.

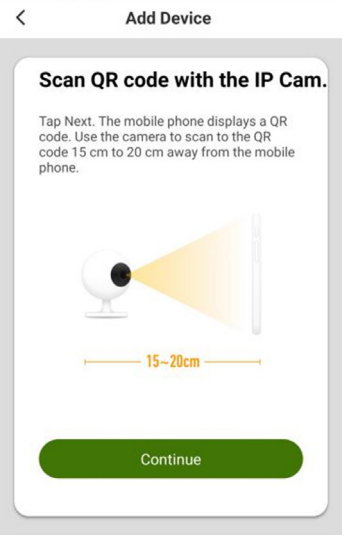
Go to App home page, click the “ADD DEVICES” on the main screen, and click the “Smart Camera”.

Select the “QR CODE” in the upper right corner, click confirm and add according to the mobile phone prompt.

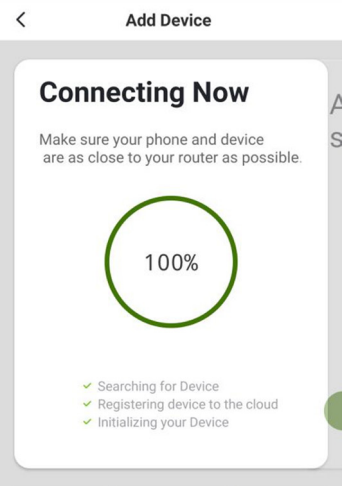

ENERJ's home
Welcome Home
Set your home location for more information
All Devices
Bedroom
No devices, please add
Add Device
My Home
Smart Scenes
Me

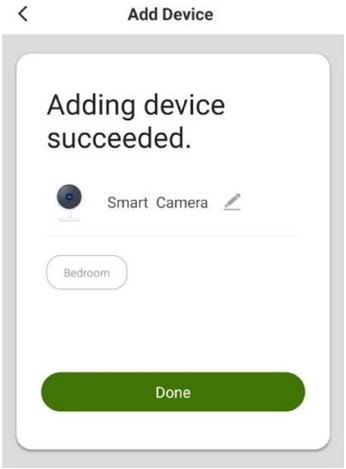

Add Manually
Search for D
Fan
Lighting (Bluetooth)
PIR
Door Sensor
Siren
Socket (Wi-Fi)
Power Strip (Wi-Fi)
Lighting (Wi-Fi)
Heater
Lock (Wi-Fi)
Smart Camera
Switch (Wi-Fi)

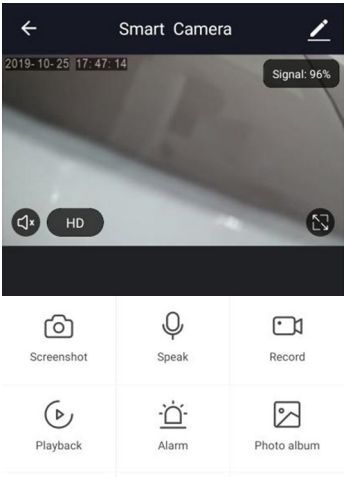

Add Device
Otherwise
Add Device
Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard
View Help
next step


Add Device
Scan QR code with the IP Cam.
Tap Next. The mobile phone displays a QR code. Use the camera to scan to the QR code 15 cm to 20 cm away from the mobile phone.
15~20cm
Continue


Add Device
Nothing happened
I heard the beep


Add Device
Connecting Now
Make sure your phone and device are as close to your router as possible.
100%
Searching for Device
Registering device to the cloud
Initializing your Device


Add Device
Adding device succeeded.
Smart Camera
Bedroom
Done


Smart Camera
2019-10-25 17:47:14
Signal: 96%
HD
Screenshot
Speak
Record
Playback
Alarm
Photo album

8 App Video Browsing Details

1. Preview Mode
2. Monitor Switch
3. More Device
4. SQ
5. Full Screen
6. Play/Pause
7. History file(Make sure insert Micro SD Card)

- Try to keep away from the metal space.
- Avoid the furniture, microwave oven blocked.
- Avoid the space where the audio, video and data lines wound, and keep the space away from them as large as possible.
- Ensure that as close as possible to the coverage of wireless Wi-Fi signals. Switching network environment.
- In the new network environment, please press the reset hole about 5 seconds, After hearing the voice prompt “reset camera successfully” and then connect to the network.