

ENER-J®
Smart Home Living

OUTDOOR WIRELESS SOLAR POWERED SIREN

SKU Code: SHA5106
EAN Code: 7061254257179






Download Our App



LiveCloud

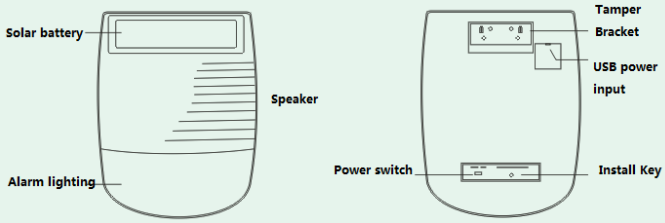

Features

- Waterproof case
- Intelligent Control
- Built-in backup lithium batteries, solar charger
- Tamper alarm
- Intelligent control, eliminate false negative, to prevent false positives, stable and reliable
- Flood monitoring, on-site high-decibel sound and light alarm, the longest one minute
- AC/DC, with backup rechargeable lithium battery, power can be used normally
- scalable output control signal, automatically turn off after the alarm valve function

Description

- Intelligent control, eliminate false negative, to prevent false positives, stable and reliable.
- Flood monitoring, on-site high-decibel sound and light alarm, the longest one minute.
- AC/DC, with backup rechargeable lithium battery, power can be used normally.
- Scalable output control signal, automatically turn off after the alarm valve function.

Technical Specification

- **Power consumption:** static: ≤ 16 m
- **Dynamic:** ≤ 220 mA
- **Back-up battery:** 3.7v 4400ma / h
- **The solar charging current:** 330mA
- **Electricity charge:** 110 ~ 240VAC, USB 5V,
- **Charge time:** ≤ 12 hours
- **Continuous cloudy standby time:** ≤ 10 days
- **The longest sound and light alarm time:** 3 minutes.
- **Receiving distance:** ≥ 150 meters (open area)
- **Alarm volume:** ≥105db
- **Power supply:** 100 ~ 240VAC
- **Quiescent current:** ≤ 25 mA
- **Alarm current:** ≤ 250 mA
- **Alarm volume:** ≥ 105db
- **Trigger delay:** ≤ 2 seconds
- **The alarm time:** ≤ 3 minutes
- **Back-up battery:** Lithium battery 3.7V / 800mAh
- **Charging time:** ≥ 8 hours
- **Standby time:** ≤ 6 hours
- **Probe connection:** 2 m
- **Allows the maximum connection distance:** ≤ 30 m
- **Dimensions:** 105 * 65 * 35 mm

How to install

1. The flooding fixed probe mounted in a suitable position detection
2. Place a good alarm, then turned on the power, the buzzer “beep” sound, warning light flashes four times off, enters the standby state
3. The alarm behind the switch to open the battery status
4. Lasted about 2 seconds when the probe detects a leak or overflow, the alarm sound and light alarm instantly spot, one minute in duration