

3W TWIN EMERGENCY NON-MAINTAINED OUTDOOR IP65 LED SPOT LIGHT 6000K



IP Rating



Protection




Voltage
220-240V



Suitable for
general industrial use,
0°C - +40°C

Product Features

- Injection moulded PC body
- Polycarbonate heads, including lens
- NiCd cells secured with fixing straps
- Suitable for mounting in any orientation
- Heads can be rotated & tilted
- Piano key terminal block for ease of installation
- 3-hour Non-Maintained
- 2x1.5W/2.5W body & heads for use from 0°C to 40°C
- 450lm total lumen output
- Self-Testing compliant with BS5266 comprising of a monthly functional test & an annual 3-hour duration test - LED indicators & audible buzzer to advise on any failure status and an annual 3-hour test
- APPLICATIONS - Suitable for general industrial use, 0°C - +40°C
- Options - Self testing Version is available

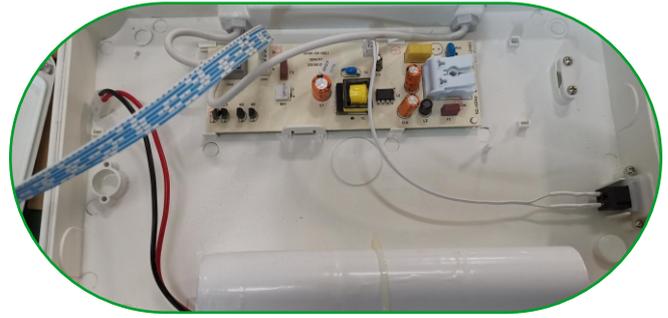

Technical Specification:

Model	:	YGTW7A-NTC05-65
Input Voltage	:	220-240V AC
Power Consumption (W)	:	3W
Light output L100 (lm)	:	380
CCT L100 (K)	:	6500K
Power factor(PF)	:	<0.5
Protection Class	:	Class II
CRI L100	:	>80
IK Rating	:	08
IP Rating	:	Ip65
Dimension (mm)	:	290*300*46.5

Dimensions Diagram

