

RF Thermostat for Infrared heating panel

Works with our SKU Code
IH1003, IH1004 and IH1007 only

SKU Code: IH1040



Features

- ▶ Big LCD with white/green Backlight selectable.
- ▶ Display clock and Daylight Saving Time (DST) switchable.
- ▶ Cooling and Heating mode switchable
- ▶ Automatically turn on/off plug-in heating or cooling device as ambient temperature changes, to save the electricity bills.
- ▶ Back Up Battery with low battery warnings.



Daylight
Saving Time



Cool Mode



Heat Mode



Battery Low
Warning


Technical Specifications:

Wireless Multi- program thermostat timer.

Wireless Frequency	433.92MHz
Voltage Choice	230V/50Hz, 120V/60Hz.
Maximum Range	20 meters in open area.
Convenient Remote ON/OFF Socket Control Button. Location by Location Switching.	
Temperature Accuracy	±1 °C or ±1 °F
Battery	2pcs x 1.5AA Battery
Model No	OPS200+OTS200.
Plug/Socket Type	UK



Pair to socket :

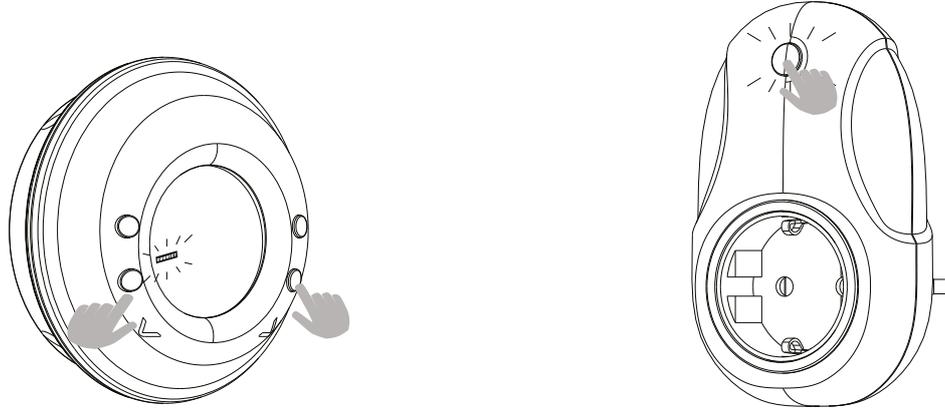

STEP 1

Press and hold the - and + button for 3 secs to activate the remote control pairing mode, The icon **CONNECT** flashes to indicate that the pairing mode has started

STEP 2

Press and hold the receiver button for 3 secs, the red LED flasher, indicating socket is in pairing mode.

STEP 3

When the red LED on stops flashing, the icon **CONNECT** on remote stays on indicating pairing is complete

Thank you for choosing ENER-J!

Customer satisfaction is our TOP priority, please let us know how you felt about your experience. Happy? We are so happy that you are pleased with our product. Feel free to express your newfound joy! Share your experience by writing a review.

Not Happy? If you are not fully satisfied with the item you received, have any problems like damages, or questions, please contact us. We typically respond within 24-48 hours.

Stuck? Confused?

Contact our Technical Support team on:

T: +44 (0)2921 252 473 E: support@ener-j.co.uk

Lines are open Mon - Fri (8am to 4pm)